

Light load capability: tested and certified at 2% of the lever hoist rated capacity.

Twin pawl: fitted as standard on WH L4 and WH ATEX-L4 lever hoists.

Safety factor: 4 : 1

Safety latches: hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.

Hook overload and traceability marks: hooks have overload indicator marks either side of the hook throat (800kg to 10t). Batch code, manufacturer's mark and hoist WLL.

Hook housings: are secured with socket head cap screws/hex head bolts and nyloc locking nuts to allow full inspection.

Fleeting/cross hauling: independently tested and verified (Test Report 2550-7615) for fleeting or cross hauling applications at angles up to 60° from the vertical without deration of the WLL.

Load chain: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).

Temperature Range: - 20°C to + 120°C.

Proof Tested: 800kg to 10 tonne hoists are proof tested to 1.5 times the Working Load Limit. 15 tonne hoists are proof tested to 1.25 times the Working Load Limit.

Optional equipment:


- Overload limiter.
- Top and bottom hook adaptors.
- Travelling end stop.

Made and proof tested in the UK.


Standards:
BS EN13157:2004 + A1:2009, ASME B30.21-2025, AS1418.2-1997, SANS 1636:2007, NORSOK R-002:2017+AC:2019/AC:2023



Single Fall

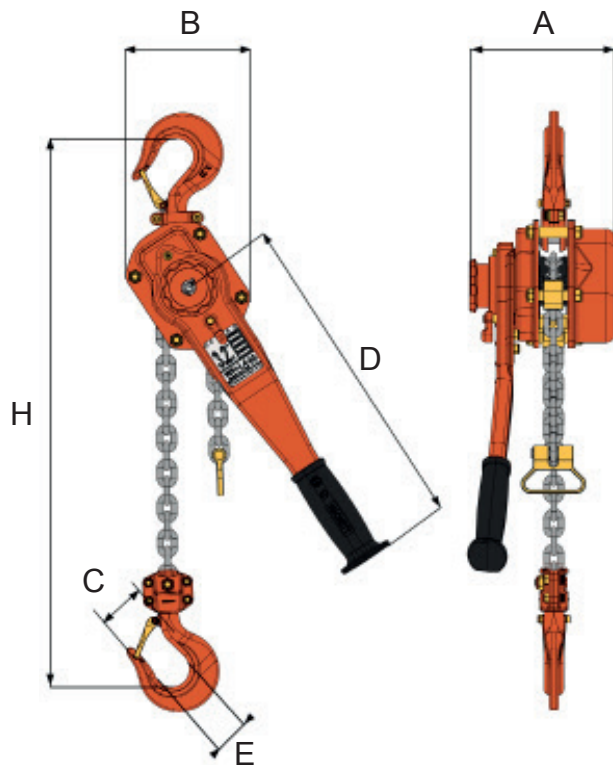

Multi Fall

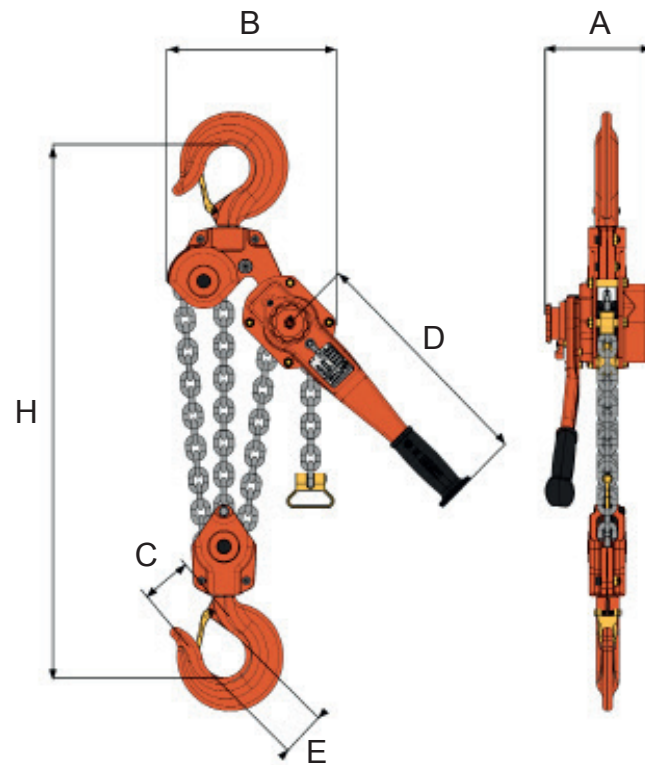

Specifications

PART CODE	WLL tonnes	NO. OF FALLS	LOAD CHAIN mm	STANDARD LIFT m	A mm	B mm	C mm	D mm	E mm	H mm	MASS Kg 1.5M HOL	EXTRA WEIGHT per M kg
033.080	0.8	1	5.6 x 17	1.5	148	121	41.0	265	35	280	6.2	0.7
033.160	1.6	1	7.1 x 21	1.5	165.5	141	51.0	415	41	350	9.6	1.1
033.320	3.2	1	10 x 30	1.5	194.5	178	61.0	415	49	420	15.5	2.2
033.630	6.3	2	10 x 30	1.5	194.5	228	85.0	415	59	570	27.0	4.4
033.900	9.0	3	10 x 30	1.5	194.5	310	89.0	415	83	680	38.3	6.6
033/1500	15.0	6	10 x 30	1.5	262	380	-	415	-	1000	90.0	13.2

Light load capability: tested and certified at 2% of the lever hoist rated capacity.

Twin pawl: fitted as standard on WH L4 and WH ATEX-L4 lever hoists.

Safety factor: 4 : 1

Safety latches: hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.

Hook overload and traceability marks: hooks have overload indicator marks either side of the hook throat (800kg to 10t). Batch code, manufacturer's mark and hoist WLL.

Hook housings: are secured with socket head cap screws/hex head bolts and nyloc locking nuts to allow full inspection.

Fleeting/cross hauling: independently tested and verified (Test Report 2550-7615) for fleeting or cross hauling applications at angles up to 60° from the vertical without deration of the WLL.

Load chain: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).

Temperature Range: - 20°C to + 120°C.

Proof Tested: 800kg to 10 tonne hoists are proof tested to 1.5 times the Working Load Limit. 15 tonne hoists are proof tested to 1.25 times the Working Load Limit.


Optional equipment:

- Overload limiter.
- Top and bottom hook adaptors.
- Travelling end stop.

Made and proof tested in the UK.

Standards:

BS EN13157:2004 + A1:2009, ASME B30.21-2025, AS1418.2-1997, SANS 1636:2007, NORSOK R-002:2017+AC:2019/AC:2023

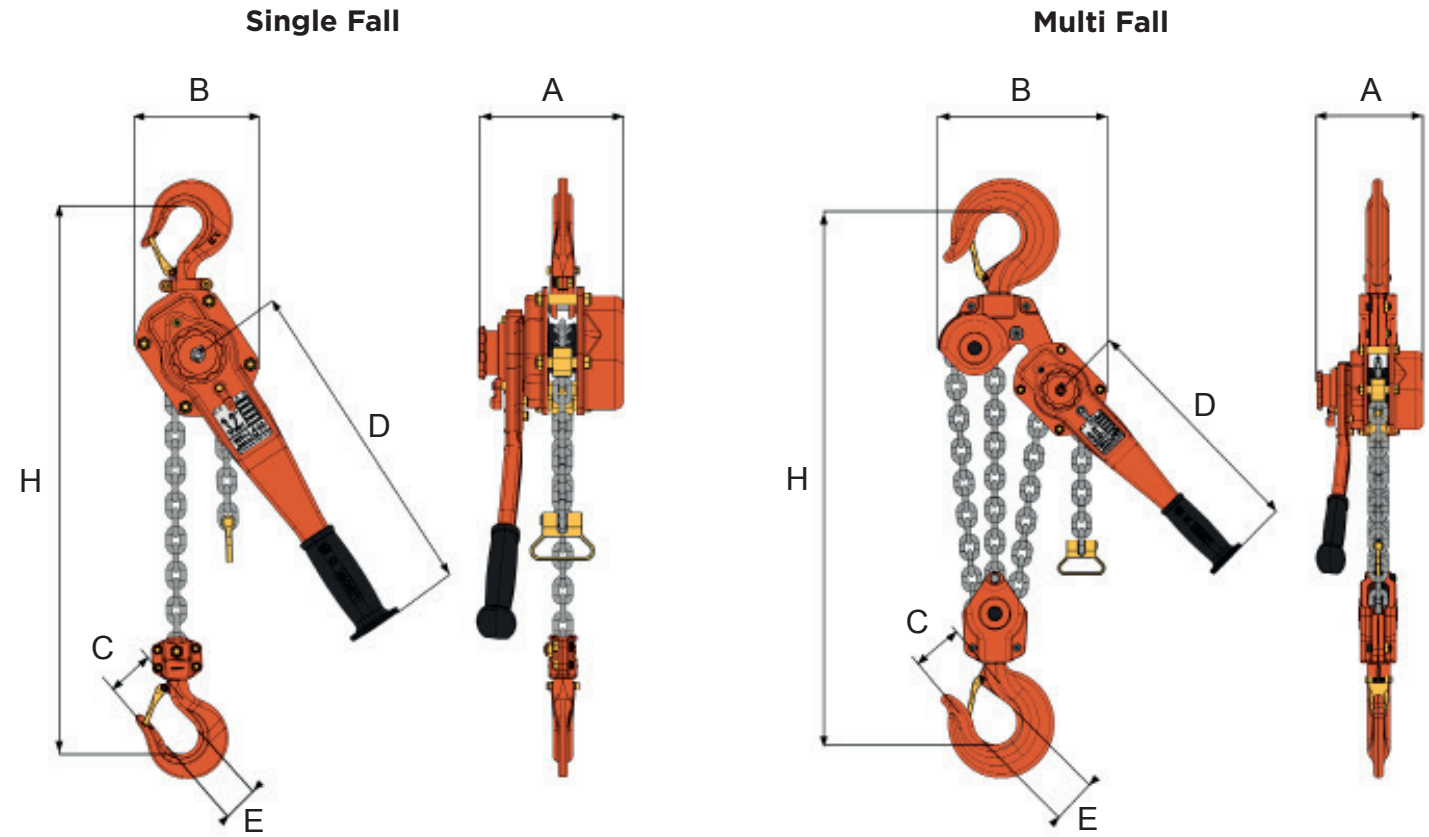

Specifications

PART CODE	WLL tons	NO. OF FALLS	LOAD CHAIN mm	STANDARD LIFT m	A inch	B inch	C inch	D inch	E inch	H inch	MASS lbs 5ft HOL	EXTRA WEIGHT per 3ft lbs
033.080	0.8	1	5.6 x 17	1.5	5.82	4.76	1.61	10.43	1.37	11.02	13.7	1.5
033.160	1.6	1	7.1 x 21	1.5	6.51	5.55	2.00	16.33	1.61	13.77	21.2	2.4
033.320	3.2	1	10 x 30	1.5	7.65	7	2.40	16.33	1.93	16.53	34.2	4.9
033.630	6.3	2	10 x 30	1.5	7.65	8.97	3.35	16.33	2.32	22.44	59.5	9.7
033.900	9.0	3	10 x 30	1.5	7.65	12.2	3.50	16.33	3.26	26.77	84.4	14.6
033/1500	15.0	6	10 x 30	1.5	10.31	14.96	-	16.33	-	39.37	198.4	29.1